

# AQUALISA


QZD.A1.EV.  
DVBTX.18

## QUARTZ™ SMART DUAL OUTLET EXPOSED


WITH ADJUSTABLE HEAD AND BATH OVERFLOW FILLER - HP/COMBI

### DIMENSIONAL DRAWINGS


#### CONTROLLER

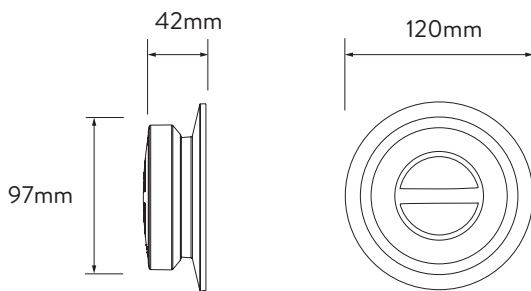



#### BATH OVERFLOW FILLER



#### PROCESSOR

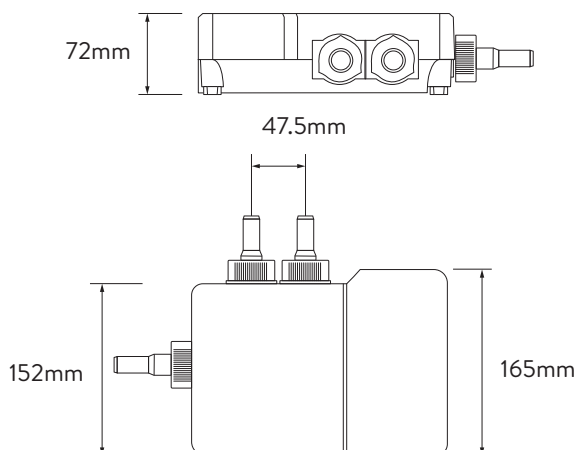

#### DIVERTER

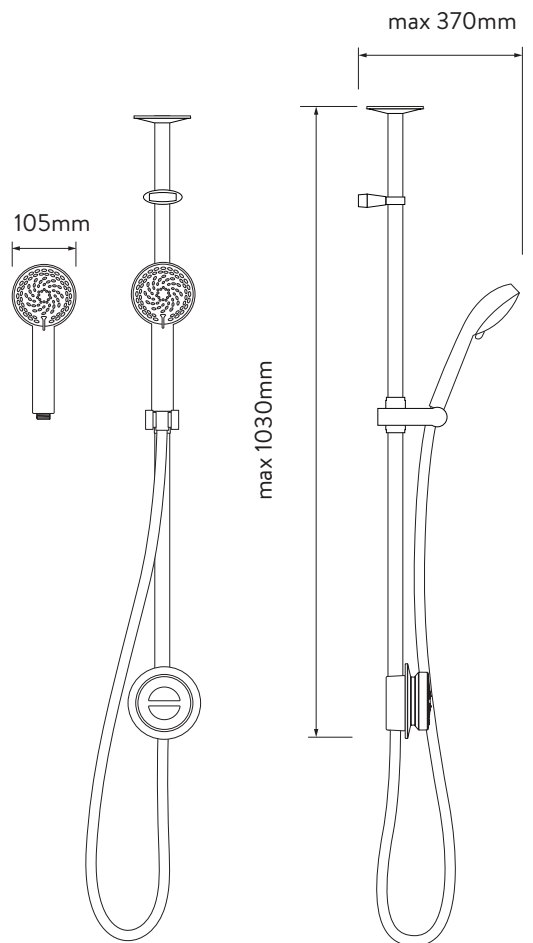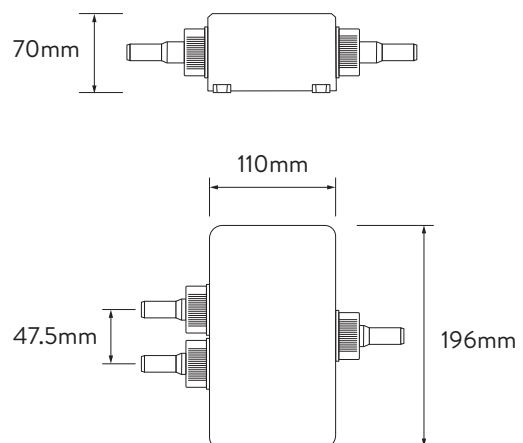

# AQUALISA

QZD.A1.EV.  
DVBTX.18

# QUARTZ™ SMART DUAL OUTLET EXPOSED

## WITH ADJUSTABLE HEAD AND BATH OVERFLOW FILLER - HP/COMBI

### TECHNICAL SPECIFICATIONS

|  |   |
|--|---|
| MINIMUM PRESSURE REQUIREMENTS          | 1 bar   |
| MAXIMUM PRESSURE REQUIREMENTS          | 7 bar   |
| PROCESSOR INLET FITTING CONNECTIONS    | 15mm push fit   |
| VALVE INLET CENTRES                    | 48mm  |
| INLET SUPPLY POSITIONS                 | Hot right, cold left  |
| PROCESSOR OUTLET FITTING CONNECTION    | 15mm push fit   |
| PERMISSIBLE PROCESSOR SITTING LOCATION | Loft, airing cupboard, under bath   |
| SUPPLY TEMPERATURE                     | Cold inlet temperature 1°C (minimum)<br>Cold inlet temperature 15°C (maximum)<br>Hot inlet temperature 65°C (maximum) |
| WATER SYSTEM                           | HP/Combi  |
| FEATURES                               | One touch start/stop control  |
|  | LED display indicates when pre-selected temperature has been reached  |
|  | Compatible with wired and wireless remote controls  |
|  | On installation, you can select the shower outlet you want to start first every time                                  |
|  | Digital diverter technology   |
|  | 4 spray patterns (adjustable head) including eco-spray option   |
| COLOUR                                 | Chrome  |
| GUARANTEE PERIOD                       | 5-year guarantee – shower unit  |
|  | 2-year guarantee – shower head and kit  |
| APPROVALS                              | CE Marking  |
|  | BEAB  |