

PRODUCT DATA SHEET

V 10000 DD

TANK AND BUND

The inner tank provides the required storage area, the outer tank forms the required bund, with capacity for 110% of the total liquid being stored.

The outer tank is fitted with a lockable sumped cabinet.

The tank is suitable for storage of Diesel, Kerosene, Water and certain other oils.

Please check before usage

THIS TANK COMPLIES WITH:

Oil Pollution Prevention Guidelines (England and Wales)

2002 PPG2 and is certified to CE standards. It is also manufactured to comply with the Oftec requirements



SPECIFICATIONS:

- * Tank contents gauge
- * Lockable sumped cabinet
- * 50 Ltr/min submersible pump c/w 4m hose and auto shut-off nozzle(240v, 110v, 24 or 12v)
- * Flow meter including current dispensed and totaliser
- * Bund alarm
- * Low level offset fill point enclosed in cabinet to meet requirements of Health and Safety. Also includes non-return valve and overflow prevention device.
- * Optional cabinet light.

DIMENSIONS:

Diameter: 2866mm

Height: 2550mm

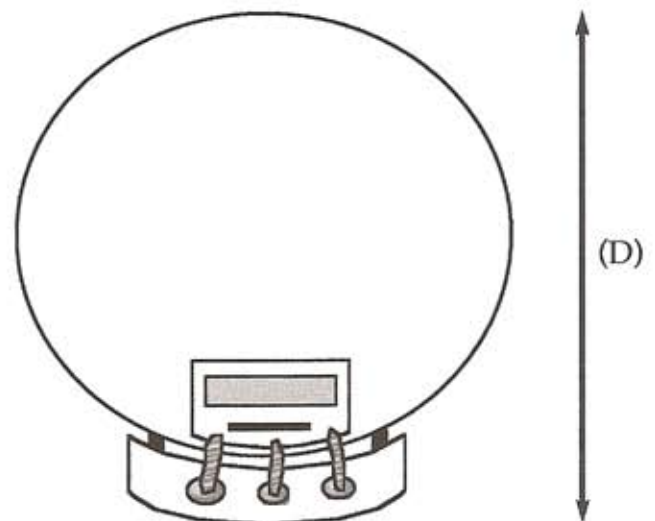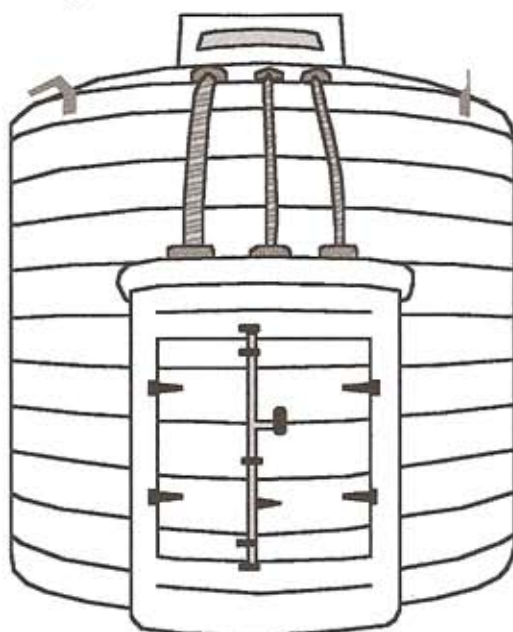

Atlantis

ENCLOSING A
LEGENDARY SERVICE