

# PRODUCT DATA SHEET

## V 5000 DD

### TANK AND BUND

The inner tank provides the required storage area, the outer tank forms the required bund, with capacity for 110% of the total liquid being stored.

The outer tank is fitted with a lockable sumped cabinet.

The tank is suitable for storage of Diesel, Kerosene, Water and certain other oils.

Please check before usage

### THIS TANK COMPLIES WITH:

OFTEC requirements and Oil Pollution Prevention Guidelines (England and Wales) 2002 PPG2.

### SPECIFICATIONS:



- \* Tank contents gauge
- \* Lockable sumped cabinet
- \* 55 Ltr/min pump c/w 4m hose and auto shut-off nozzle (240v, 110v, 24 or 12v)
- \* Bund alarm
- \* Flow meter including 3 digit dispensed total, and 6 digit totaliser
- \* Low level offset fill point enclosed in cabinet to meet requirements of Health and Safety. Also includes non-return valve and overflow prevention device.

### DIMENSIONS:

Length: 2750mm

Width: 2120mm

Height: 2300mm

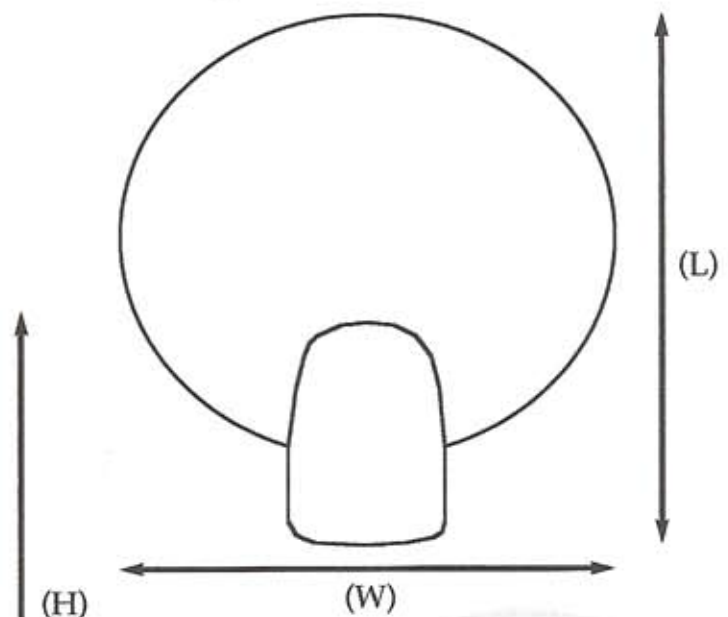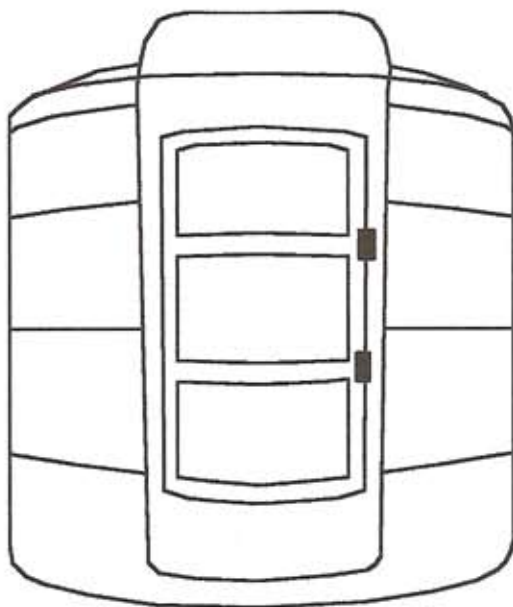

Atlantis

ENCLOSING A  
LEGENDARY SERVICE