


## TECHNICAL DATA SHEET

### COBALT DUAL CONTROL RANGE COB SHCDIV C


#### Product Specification

<b>Product Code:</b>	COB SHCDIV C
<b>Finish:</b>	Chrome
<b>Product Type:</b>	Contemporary
<b>Construction:</b>	Body is of brass construction
<b>Supply:</b>	Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature.
<b>Inlet Connections:</b>	15mm Compression connections
<b>Working Pressures:</b>	Working pressures 0.2-5.0 Bar
<b>Maximum Static Pressure:</b>	10 Bar

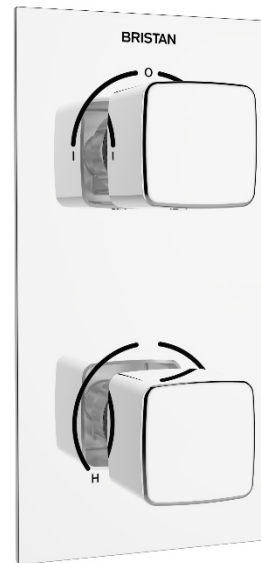

#### Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 58-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 9 l/min
- Requires rear access to service the filters
- Cartridge can be accessed from front

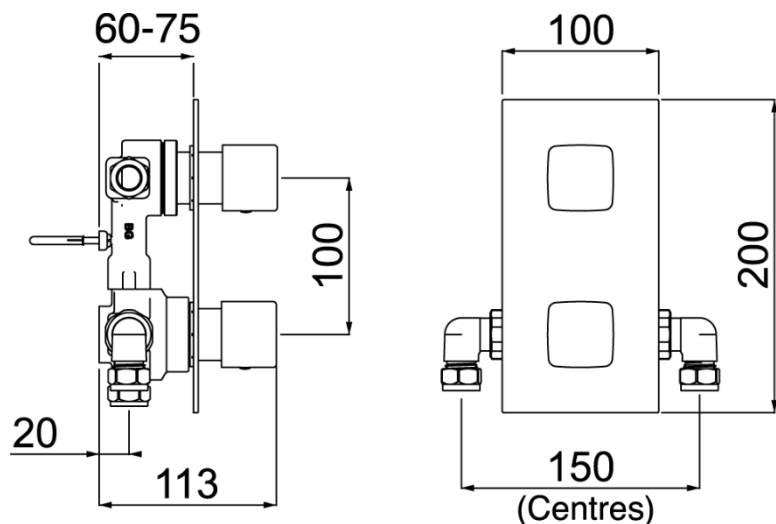

**Technical Advice:** For further information please call 0844 7016273 or email [customercare@bristan.com](mailto:customercare@bristan.com)

**Guarantee:** 5 years covering manufacturing faults.

System Pressure	0.1bar	0.2bar	0.5bar	1.0bar	2.0bar
COB SHCDIV C - Outlet 1	3.5	6.9	12.8	19	27.6
COB SHCDIV C - Outlet 2	2.6	6.7	12.5	18.5	27