

PRISM

Exposed Sequential Chrome Shower Valve Only



Product Specification

Product Code:	PM2 SQSHXVO C
Finish:	Chrome
Cartridge Type:	Thermostatic Cartridge
Connection Inlet:	15mm Compression
Inlet Centres:	Adjustable from 136mm – 158mm
Maximum Temperature:	Pre-set 42oC
Working Pressures:	Min 0.1 Bar, Max 5.0 Bar



Additional Information

- Chrome plated to BS EN 248:2002
- Supplied with 2x 8 litres per minute flow regulators
- Factory fitted regulators means this is a water saving shower
- Adjustable inlet centres mean you can use existing pipework with centres measuring anything between 136mm and 158mm.
- Matching taps available

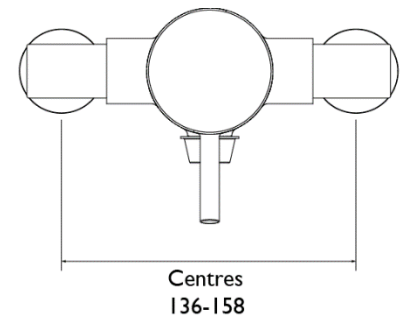


Flow Rates (litres per minute)

System Pressure	0.2bar	0.5bar	1bar	2bar	3bar	5bar
With Flow Regulators	--	12.7	13.4	14.5	14.8	12.9
Without Flow Regulators	10.3	18.6	27.3	39.1	48	61.7

Technical Advice: For further information please call 0844 7016273 or email customer@bristan.com

Guarantee: 5 years covering manufacturing faults.

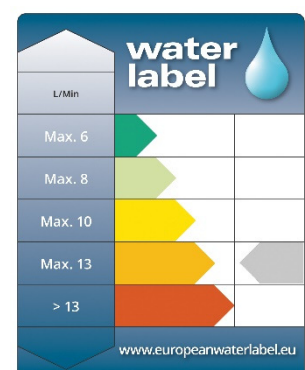

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
 Telephone: 0844 701 6274 Facsimile: 0844 701 6275
 Web Site: www.bristan.com Email: enquire@bristan.com

