





Pipe Centre Tappings (mm)



For dual fuel +/- 70mm.

Width mm	A mm
400	355
500	455
600	555

Projection (mm)



Width mm	B mm	C mm
400	83-106	-
500	83-106	92-115
600	83-106	100-123

B = Straight, C = Curved.


Hydronic AVONMORE Straight.

Code	Width mm	Height mm	Btu/hr Δ50°C		Watts Δ50°C		Btu/hr Δ30°C		Watts Δ30°C	
			White	Chrome	White	Chrome	White	Chrome	White	Chrome
ECOS84	400	862	-	799	-	234	-	416	-	122
ECOS85	500	862	1423	945	417	277	739	492	217	144
ECOS86	600	862	1662	1119	487	328	863	583	253	171
ECOS124	400	1222	-	1140	-	334	-	586	-	172
ECOS125	500	1222	1965	1348	576	395	1027	693	301	203
ECOS126	600	1222	2307	1593	676	467	1206	819	353	240
ECOS184	400	1807	-	1730	-	507	-	880	-	258
ECOS185	500	1807	2955	2040	866	598	1552	1038	455	304
ECOS186	600	1807	3460	2405	1014	705	1817	1224	533	359


Hydronic AVONMORE Curved.

ECOC85	500	862	1423	945	417	277	739	492	217	144
ECOC86	600	862	1662	1119	487	328	863	583	253	171
ECOC125	500	1222	1965	1348	576	395	1027	693	301	203
ECOC126	600	1222	2307	1593	676	467	1206	819	353	240
ECOC185	500	1807	2955	2040	866	598	1552	1038	455	304
ECOC186	600	1807	3460	2405	1014	705	1817	1224	533	359

ECO. (1807 height)

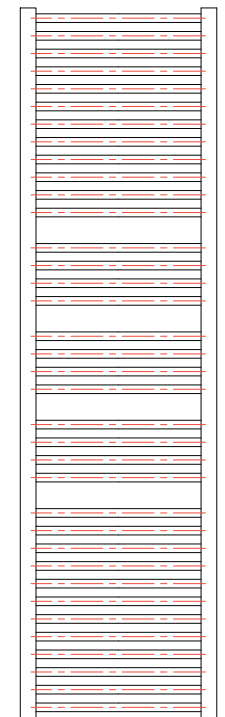

ECO. (1222 height)

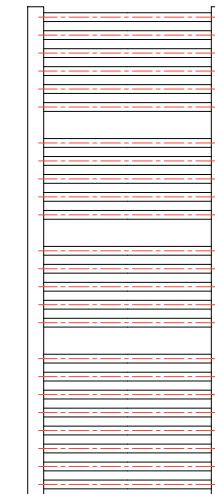

ECO. (862 height)

