


TECHNICAL DATA SHEET

ORB DUAL CONTROL RANGE ORB SHCDIV C

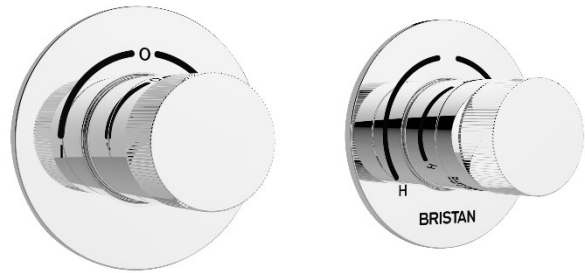


Product Specification

Product Code: ORB SHCDIV C
Finish: Chrome
Product Type: Contemporary
Construction: Body is of brass construction
Supply: Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature.
Inlet Connections: 15mm Compression connections
Working Pressures: Working pressures 0.2-5.0 Bar
Maximum Static Pressure: 10 Bar

Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 58-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 8 l/min
- Requires rear access to service the filters
- Cartridge can be accessed from front

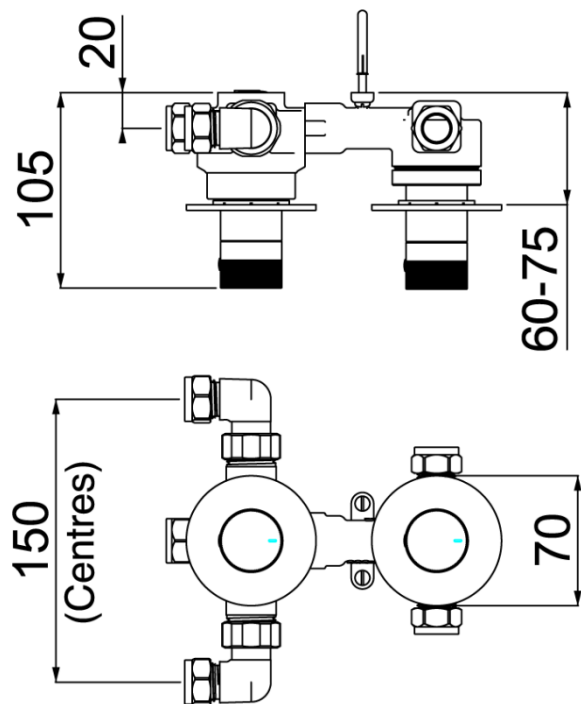

Technical Advice: For further information please call 0844 7016273 or email customer care@bristan.com

Guarantee: 5 years covering manufacturing faults.

System Pressure	0.1bar	0.2bar	0.5bar	1.0bar	2.0bar
ORB SHCDIV C - Outlet 1	3.5	6.9	12.8	19	27.6
ORB SHCDIV C - Outlet 2	2.6	6.7	12.5	18.5	27